Official Partner of

DRUTEX
WINDOWS DOORS SHUTTERS GATES

Quality
The latest technology, the best materials and production controlled at every stage as well as our own research laboratories guarantee the highest quality.

Security
Windows are equipped with reliable fittings and locks that ensure their safe use.

Service
Professional and fast service is the hallmark of Drutex, which has been setting trends in pre- and post-sales customer service for years.

Smart Home
Intelligent control of doors, windows, roller shutters, façade blinds, mosquito nets, gates, wickets and lighting using a smartphone.

PVC WINDOWS

BORN OF PASSION
AND EXPERIENCE

DRUTEX
WINDOWS DOORS SHUTTERS GATES

Official Partner of FC Bayern

ul. Leszka Gierszewskiego 1, 77-100 Bytów
+48 59 822 91 01

SINCE 1985

The information presented in this advertising material is for informational and illustrative purposes only. Product specifications should be subject to verification with the technical data specified by the manufacturer.

BUSINESS PARTNER

Wersja: 15-07-2026

DRUTEX
WINDOWS DOORS SHUTTERS GATES

IGLO 5 CLASSIC

The profile has a 5-chamber structure with a 70 mm installation depth. It has steel reinforcement of the sash and frame. The window is equipped with double EPDM seal: external and internal.

IGLO 5*

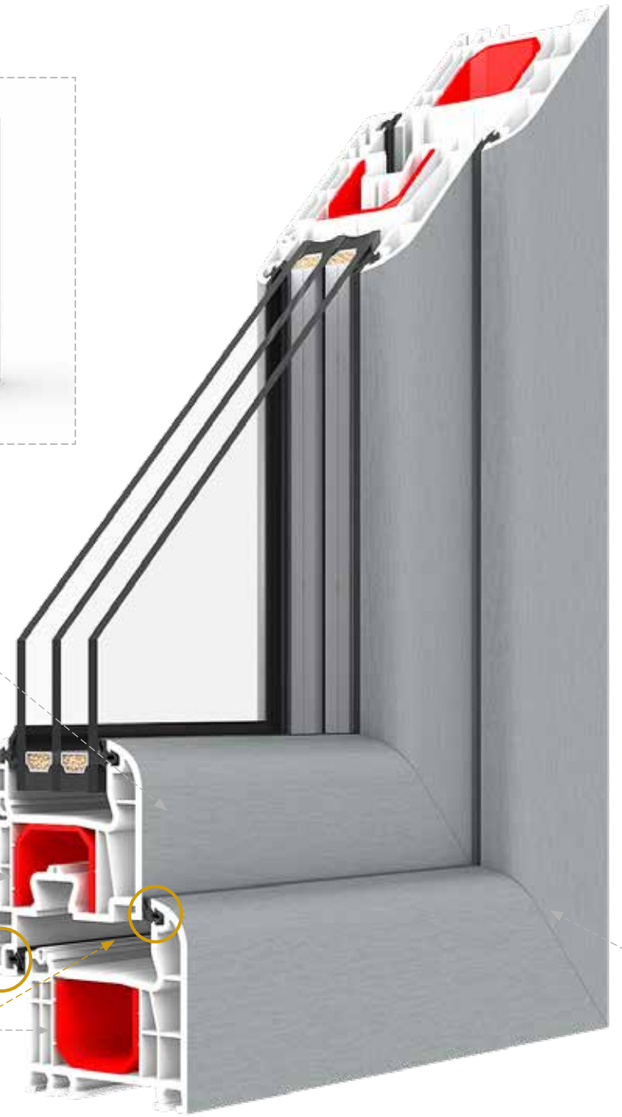

non-flush profile

1,5 mm channel reinforcement

2
EPDM gaskets

optional
V-perfect weld



ADAPTATION FRAME
35 mm



RENOVATION FRAME
41 mm or **65** mm

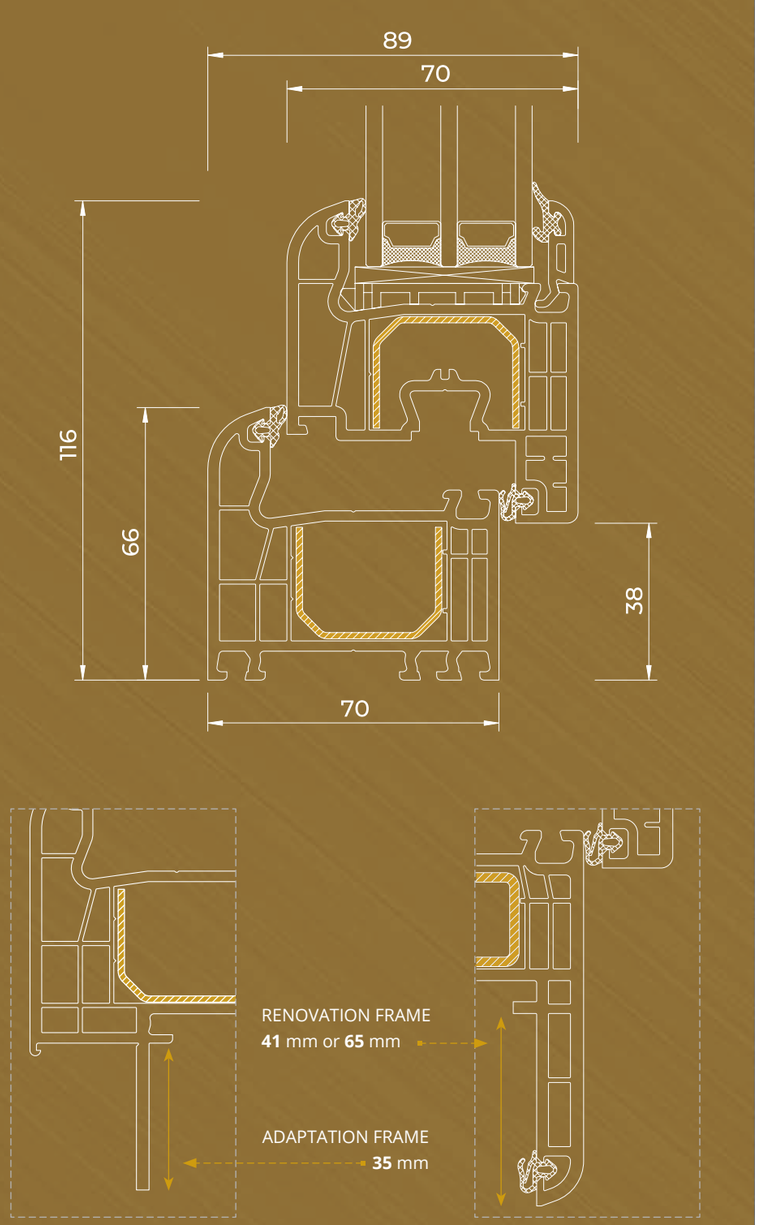

- MACO fittings with 2 anti-burglary catches
- argon-filled glazing unit
- glazing with packages in the range of 24-40 m
- galvanized steel frame or Swisspacer Ultimate warm edge
- microventilation
- aluminum handle
- black or grey EPDM perimeter and glazing seals
- wide range of PVC veneer colors
- white profile color (brown or anthracite optional)
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- 1,5 mm steel reinforcement of the frame and door leaf (2 mm in the case of the balcony door leaf) in the C-shaped channel reinforcement

* IGLO 5 - semi-flush sash

IGLO 5 CLASSIC

5
chambers

2
EPDM gaskets

70
installation depth
/ mm /

0,83*
Uw for Ug=0,6 W/(m²K)

* Value determined by calculation for the reference window with a 4th/14/4/14/4th glazing unit

R
renovation frame
41 mm or 65 mm

A
adaptation frame
35 mm

Class profile
A

PERFECT · Smart Home · RC2 N · RC2

DRUTEX
WINDOWS DOORS SHUTTERS GATES

IDEAL NEO MD aluplast®

The profile has a 6-chamber structure with a depth of 76 mm. It has a steel reinforcement of the sash and frame.
The window is triple sealed.

IDEAL NEO AD*

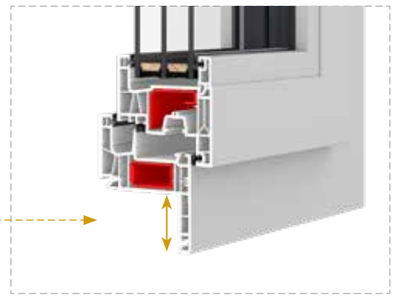

RENOVATION FRAME **40** mm or **70** mm

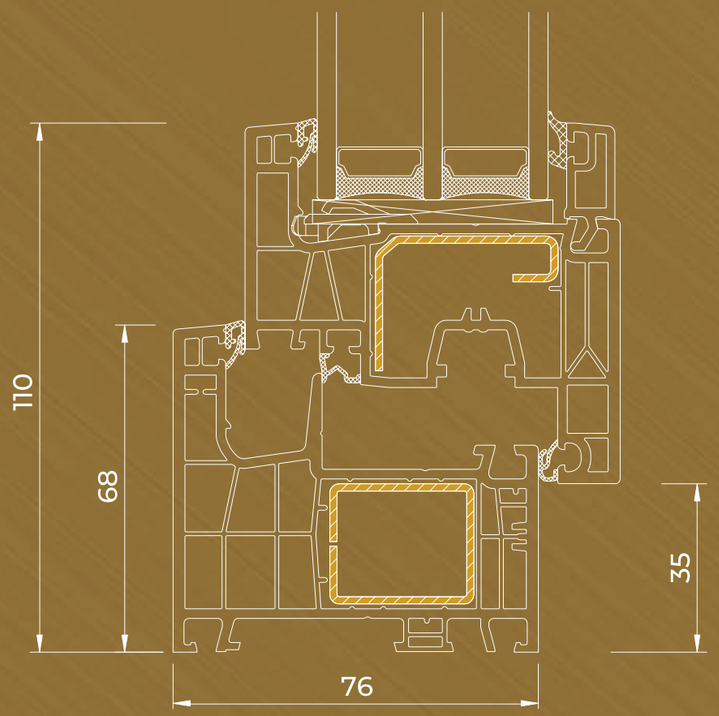



RENOVATION FRAME **40** mm or **70** mm

- ROTO fittings
- 4 anti-burglary catches
- argon-filled glazing unit
- glazing with packages in the range of 24-54 m
- galvanized steel frame or Swisspacer Ultimate warm plastic edge
- microventilation
- aluminum handle
- perimeter and glazing seals in black or grey color
- wide range of PVC veneer colors
- white profile color (brown or anthracite optional)
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- 1,5 mm steel reinforcement of the frame and door leaf (2 mm in the case of the balcony door leaf)

* IDEAL NEO AD - double gasket system

IDEAL NEO MD

6
chambers

3
corner welded gaskets

76
installation depth
/ mm /

0,76*
Uw for Ug=0,5 W/(m²K)

* Value determined by calculation for the reference window with a 4th/18/4/18/4th glazing unit

R
renovation frame
40 mm or 70 mm

aluplast®
Class profile
B

PERFECT
Smart Home

DRUTEX
WINDOWS DOORS SHUTTERS GATES

IDEAL NEO MD-FS | aluplast

A modern 5-chamber system with a depth of 70 mm, featuring a cubist design and a sash overlap of 108 mm. Instead of steel in the sash, it uses fiberglass inserts and bonded glazing. A visually light yet durable construction with an optional movable mullion.

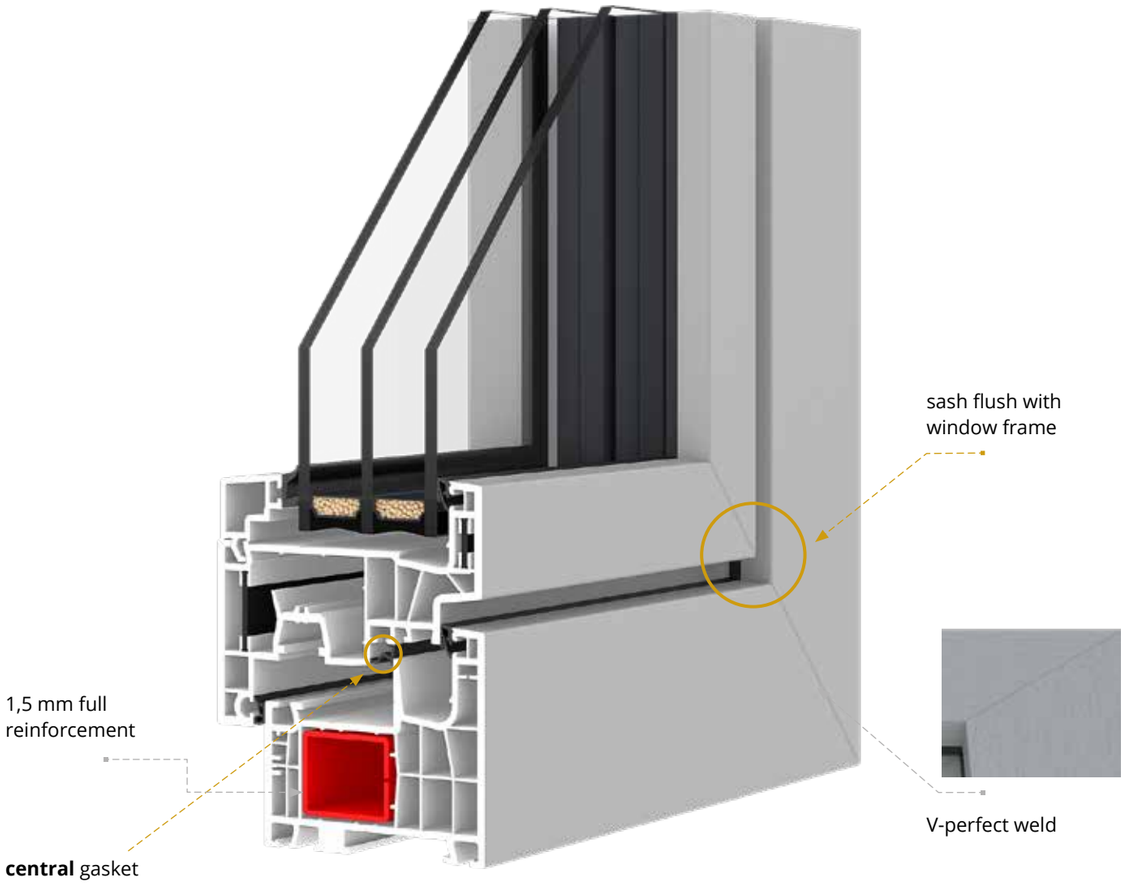

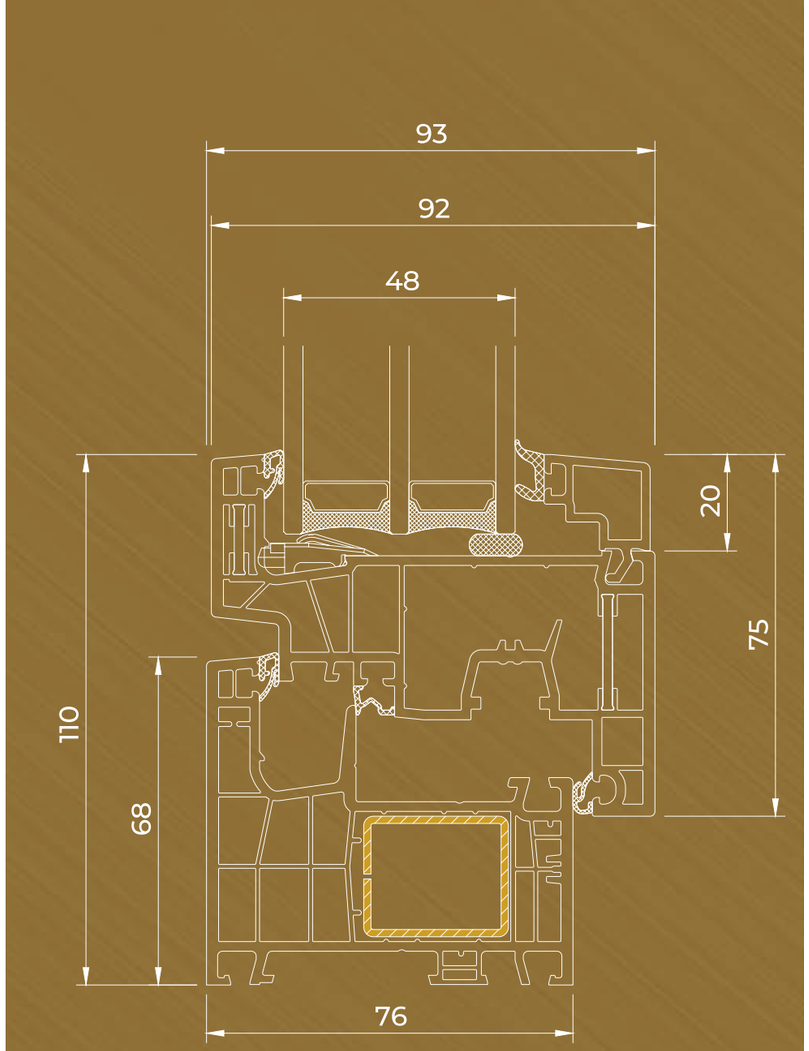

- ROTO fittings
- 4 anti-theft strikers according to the size of the sash and the hardware system
- glazing with packages in the range of 36-68 mm
- argon-filled glazing unit
- Swisspacer Ultimate warm edge
- microventilation
- aluminum handle
- perimeter and glazing seals in black or grey color
- wide range of PVC veneer colors
- white profile color (brown or anthracite optional)
- handle misplacement locking mechanism
- filling of the lower hardware groove

IDEAL NEO MD-FS

6
chambers

3
corner welded gaskets

76
installation depth
/ mm /

0,73*
Uw for Ug=0,5 W/(m²K)

* Value determined by calculation for the reference window with a 4th/18/4/18/4th glazing unit

aluplast
Class profile
B

PERFECT
Smart Home

DRUTEX
WINDOWS DOORS SHUTTERS GATES

IGLO ENERGY CLASSIC

7-chamber frame and sash profiles, with an installation depth of 93 mm, provide excellent thermal insulation and long-lasting structural durability. The system features a specially designed aluminium cladding and a triple sealing system comprising external, internal, and central gaskets made of foamed EPDM.

IGLO ENERGY*



ADAPTATION FRAME **35** mm



RENOVATION FRAME **47** mm

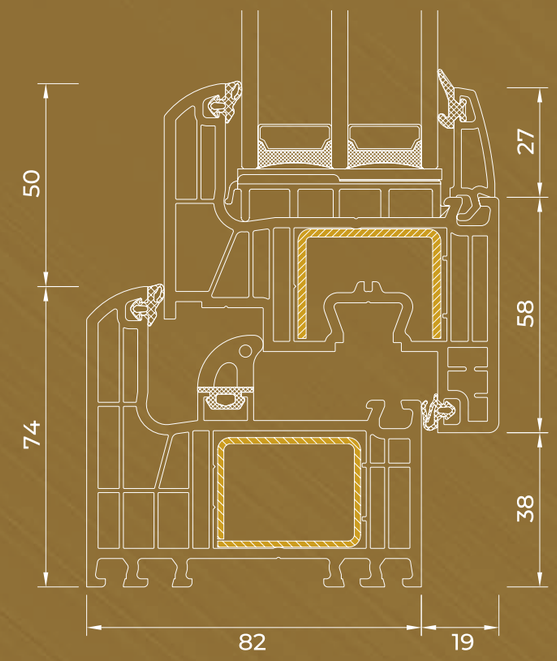

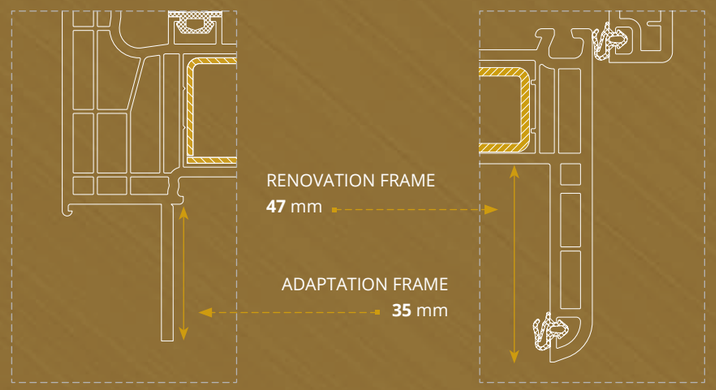

- MACO fittings with 4 anti-burglary catches
- glazing with packages in the range of 24-52 mm
- argon-filled glazing unit
- galvanized steel frame or Swisspacer Ultimate warm plastic edge
- microventilation
- aluminum handle
- black or grey EPDM perimeter, glazing and central seals
- wide range of pvc veneer colors
- 3 profile colors to choose from: white, brown or anthracite
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- full (closed) steel frame reinforcement, „c" shaped steel sash reinforcement
- 5-chamber PVC under-sill strip with a gasket

* IGLO ENERGY - semi-flush sash

IGLO ENERGY CLASSIC

7
chambers

3
EPDM gaskets

82
installation depth
/ mm /

0,73*
Uw for Ug=0,5 W/(m²K)

* Value determined by calculation for the reference window with a 4th/18/4/18/4th glazing unit

R
renovation frame
47 mm

A
adaptation frame
35 mm

Class profile
A

PERFECT · Smart Home · RC2 N · RC2

DRUTEX
WINDOWS DOORS SHUTTERS GATES

IGLO ENERGY ALUCOVER

7-komorowe profile ramy i skrzydła o głębokości zabudowy 93 mm zapewniają wysoką izolacyjność oraz trwałość konstrukcji. System wyposażono w specjalnie zaprojektowaną nakładkę aluminiową oraz potrójny system uszczelnienia: zewnętrzny, wewnętrzny i centralny wykonany ze spienionego EPDM.

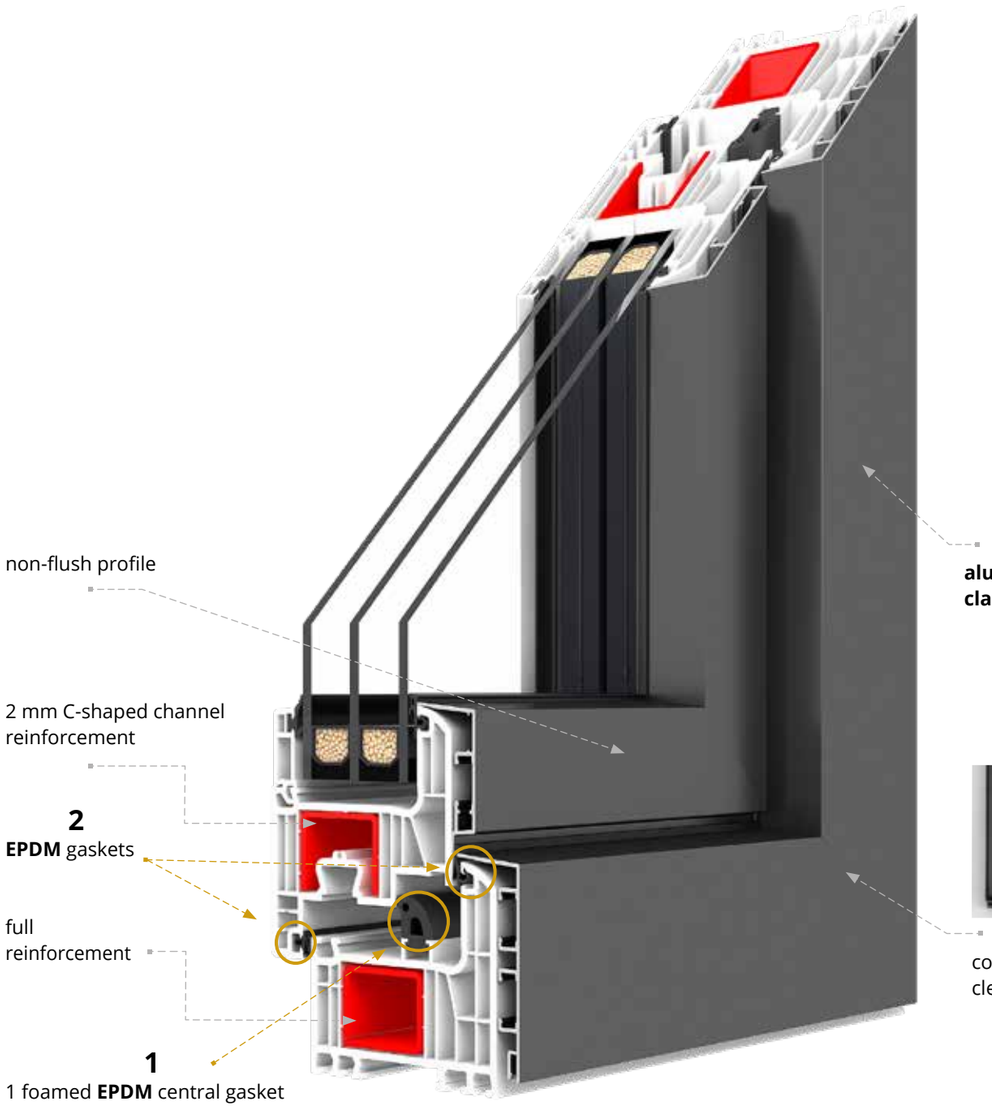

corner joints: cleated or welded



ADAPTATION FRAME **35** mm

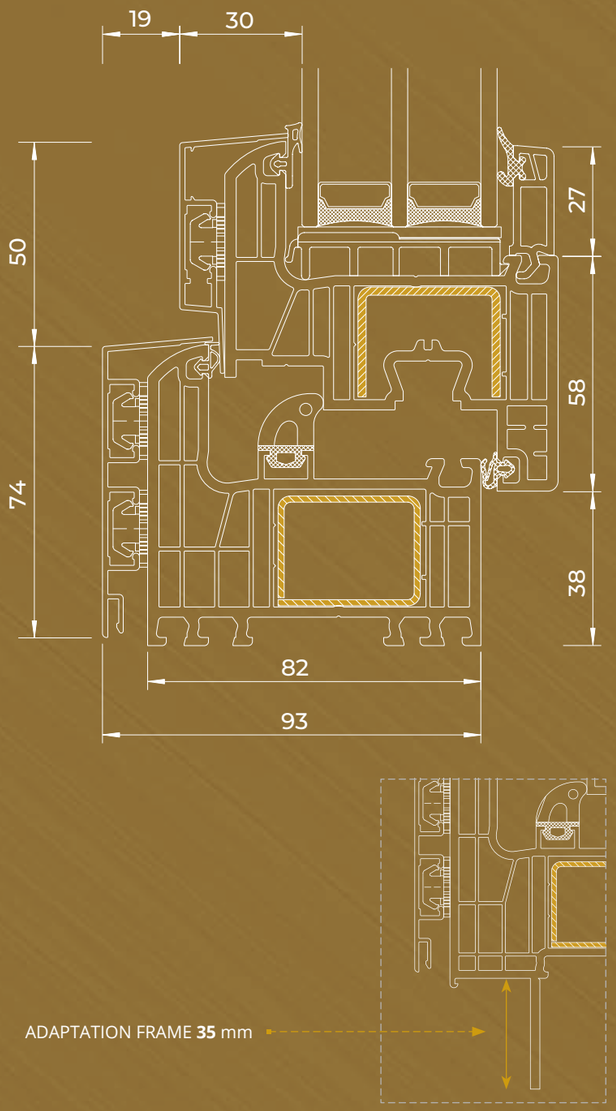

- MACO fittings with 4 anti-burglary catches
- glazing with packages in the range of 24-52 mm
- argon-filled glazing unit
- galvanized steel frame or Swisspacer Ultimate warm plastic edge
- microventilation
- aluminum handle
- black or grey EPDM perimeter, glazing and central seals
- wide range of pvc veneer colors
- 3 profile colors to choose from: white, brown or anthracite
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- full (closed) steel frame reinforcement, „c" shaped steel sash reinforcement
- 5-chamber PVC under-sill strip with a gasket

IGLO ENERGY ALUCOVER

7
chambers

3
EPDM gaskets

93
installation depth
/ mm /

0,76*
Uw for Ug=0,5 W/(m²K)

* Value determined by calculation for the reference window with a 4th/18/4/18/4th glazing unit

A
adaptation frame
35 mm

Class profile
A

PERFECT · Smart Home · RC2 N · RC2

DRUTEX
WINDOWS DOORS SHUTTERS GATES

IGLO EDGE

7-chamber frame and sash profiles, with an installation depth of 82 mm. The system is equipped with a specially designed triple seal: external, internal and central made of EPDM and gaskets under the glazing unit.

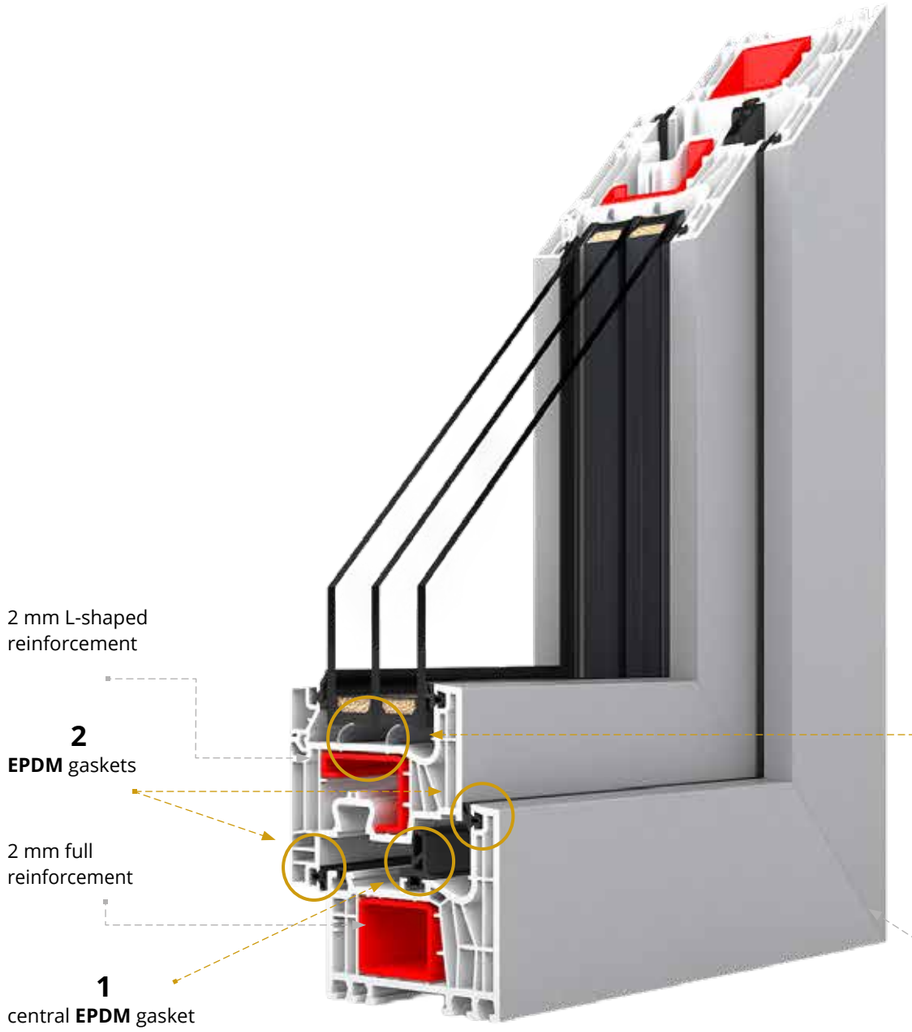

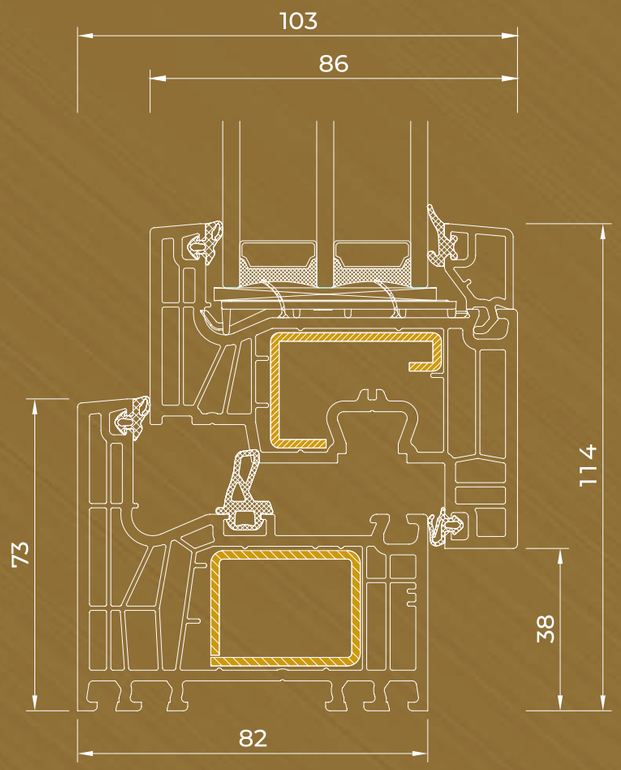

- MACO fittings with 4 anti-burglary catches
- glazing with packages in the range of 48-58 mm
- argon-filled glazing unit
- optional triple-glazing package with Ug=0,4 W(m²K)
- Swisspacer Ultimate warm plastic edge (optional galvanized steel spacer)
- microventilation
- aluminum handle DUBLIN
- black or grey EPDM perimeter, glazing and central seals
- wide range of PVC veneer colors
- 3 profile colors to choose from: white, brown or anthracite
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- 2 mm full (closed) steel frame reinforcement, L-shaped steel door sash reinforcement

IGLO EDGE

7
chambers

3
EPDM gaskets

82
installation depth
/ mm /

0,73*
Uw for Ug=0,5 W/(m²K)
TRIPLE 3-GLAZED
* Value determined by calculation for the reference window with a 4th/18/4/18/4th glazing unit

0,66*
Uw for Ug=0,4 W/(m²K)
QUADRUPLE 4-GLAZED
* Value determined by calculation for the reference window with a 4th/18/4/18/4th glazing unit

Class profile
A

PERFECT
Smart Home

DRUTEX
WINDOWS DOORS SHUTTERS GATES

FOIL COLORS SAMPLE

The printout may differ from reality.

Concrete grey
702305-167

Basalt grey smooth
701205-097

Crown Platinum
9.1293001-195

Cream
137905-167

Quartzite grey
703905-167

Dark red
308105-167

Light grey
725105-167

Anthracite Ulti-Matt
02.20.71.000001-504700

Quartz grey smooth
703905-097

Natural oak
3118076-167

Oregon
2115008-167

Palisander
851805-167

Slate
1.0065002-097

Slate grey smooth
02.11.71.000040-097

Black Ulti-Matt
02.20.01.000002-504700

Grey
715505-167

Smooth anthracite
701605-097

Golden oak
2178001-167

Pyrite
02.12.17.000001

Jet Black CC+
476-6062

Dark green
612505-167

Turner oak
F470-3001

Moss green
600505-167

FX white
915205-168

Anthracite
701605-167

Chocolate brown
887505-167

Douglas fir
3152009-167

Dark oak
2052089-167

Macore
3162002-167

Mahogany
2097013-167

Basalt grey
70125-097

Nut
2178007-167

Sheffield oak light
F 456-3081

Winchester
49240015-148

White sand Ulti-Matt
PX 9152

Deep bronze
F4701029

Sandblasted graphite MAT
436-6023

Turner oak toffee
470-3004

Turner oak walnut
470- 9036

Brilliant Blue
470- 9036

Steel Blue
470- 9036

HANDLES

The handles used in our products are made of aluminum and are distinguished not only by their elegant design, available color options, but also by their ergonomic shape. The handles can be available in options with a key or a button to prevent accidental opening (an option especially recommended for children's rooms).

ALUMINUM WINDOW AND BALCONY HANDLES

WINDOW HANDLE MISTRAL

WINDOW HANDLE NEVADA

WINDOW HANDLE SQUARE

WINDOW HANDLE DUBLIN

WINDOW HANDLE HOPPE SECUSTIK TOULON

WINDOW HANDLE HOPPE SECUFORTE TOULON

WINDOW HANDLE HOPPE SECUSTIK HAMBURG

WINDOW HANDLE HOPPE SECUFORTE HAMBURG

WINDOW HANDLE HOPPE SECUSTIK ATLANTA

WINDOW HANDLE 1033

WINDOW HANDLE MA 1010 STAINLESS STEEL

REMOVABLE WINDOW HANDLE

WITH KEY AND TBT FUNCTION

BALCONY DOOR HANDLE

BALCONY DOOR HANDLE 1033

VERANDA DOOR HANDLE



Available in colors: white, brown, silver, titanium, anthracite, black, old gold, cream*.

* Colour availability and shade may vary depending on the handle model.

DRUTEX
WINDOWS DOORS SHUTTERS GATES

GLASS

Our offer includes many types of glass, which are characterized by the highest quality of workmanship. Choose glass for your windows that will meet your expectations and which will add a unique character to the interior.

We have been producing glazing packages since 1994. We have a modern glass tempering plant and our own research laboratories, which ensure the highest quality of the glazing units that we produce.

The glazing units can be equipped with special capillaries that equalize the pressure inside the glazing with atmospheric pressure. Thanks to this solution, the glazing units will work perfectly in seaside locations as well as those located high in the mountains.

Safety
Possibility of using a thermal coating.

Satin matt

Stopsol brown 6 mm

Stopsol blue 6 mm

Ornament Chinchilla

Ornament Delta

Ornament Silvit

Ornament Cathedral

Ornament Master Carre



Waterfall 105

Antisol green
4 lub 6mm

Antisol brown
4 lub 6mm

Antisol grey

Antisol blue

Float 4, 6, 8, 10 mm
Possibility of using a thermal coating.

Mirastar

ℹ The printout may differ from reality.
* To perform sandblasting, contact the Drutex technological department or ask your dealer.

WARM EDGE

SWISSPACER ULTIMATE

no extra charge

White
RAL 9016

Light grey
RAL 7035

Gray
RAL 9023

Light brown
RAL 8003

Dark brown
RAL 8014

Black
RAL 9005

More details you will find in our catalogue

DRUTEX
WINDOWS DOORS SHUTTERS GATES

Technical data	IGLO 5 CLASSIC	IDEAL NEO MD	IDEAL NEO MD-FS	IGLO ENERGY CLASSIC	IGLO ENERGY ALUCOVER	IGLO EDGE
Number of chambers	5	6	6	7	7	7
Installation depth	70 mm	76 mm	76 mm	82 mm	93 mm	82 mm
Number of gaskets	2	3	3	3	3	3
Thermal transmittance	Uw = 0,83 W/(m²K)* *For a window measuring 1230x1480 mm, with steel reinforcement and the argon gas-filled glass package Ug = 0,6 W/(m²K), with the Swisspacer plastic spacer bar.	Uw = 0,76 W/(m²K)* *For a window measuring 1230x1480 mm, with the argon gas-filled glass package Ug = 0,5 W/(m²K), with the Swisspacer plastic spacer bar.	Uw = 0,73 W/(m²K)* *For a window measuring 1230x1480 mm, with the argon gas-filled glass package Ug = 0,5 W/(m²K), with the Swisspacer plastic spacer bar.	Uw = 0,73 W/(m²K)* *For a window measuring 1230x1480 mm, with the argon gas-filled glass package Ug = 0,5 W/(m²K), with the Swisspacer plastic spacer bar.	Uw = 0,76 W/(m²K)* *For a window measuring 1230x1480 mm, with the argon gas-filled glass package Ug = 0,5 W/(m²K), with the Swisspacer plastic spacer bar.	Uw = 0,73 W/(m²K)* *For a window measuring 1230x1480 mm, with the argon gas-filled glass package Ug = 0,5 W/(m²K), with the Swisspacer plastic spacer bar.
Glass packages	24-40 mm	24-54 mm	36-68 mm	24-52 mm	24-52 mm	48-58 mm
Sound insulation	34-43 dB	36 - 38 dB	36 dB	36-47 dB	36-47 dB	36-47 dB

Learn more about our entire offer.

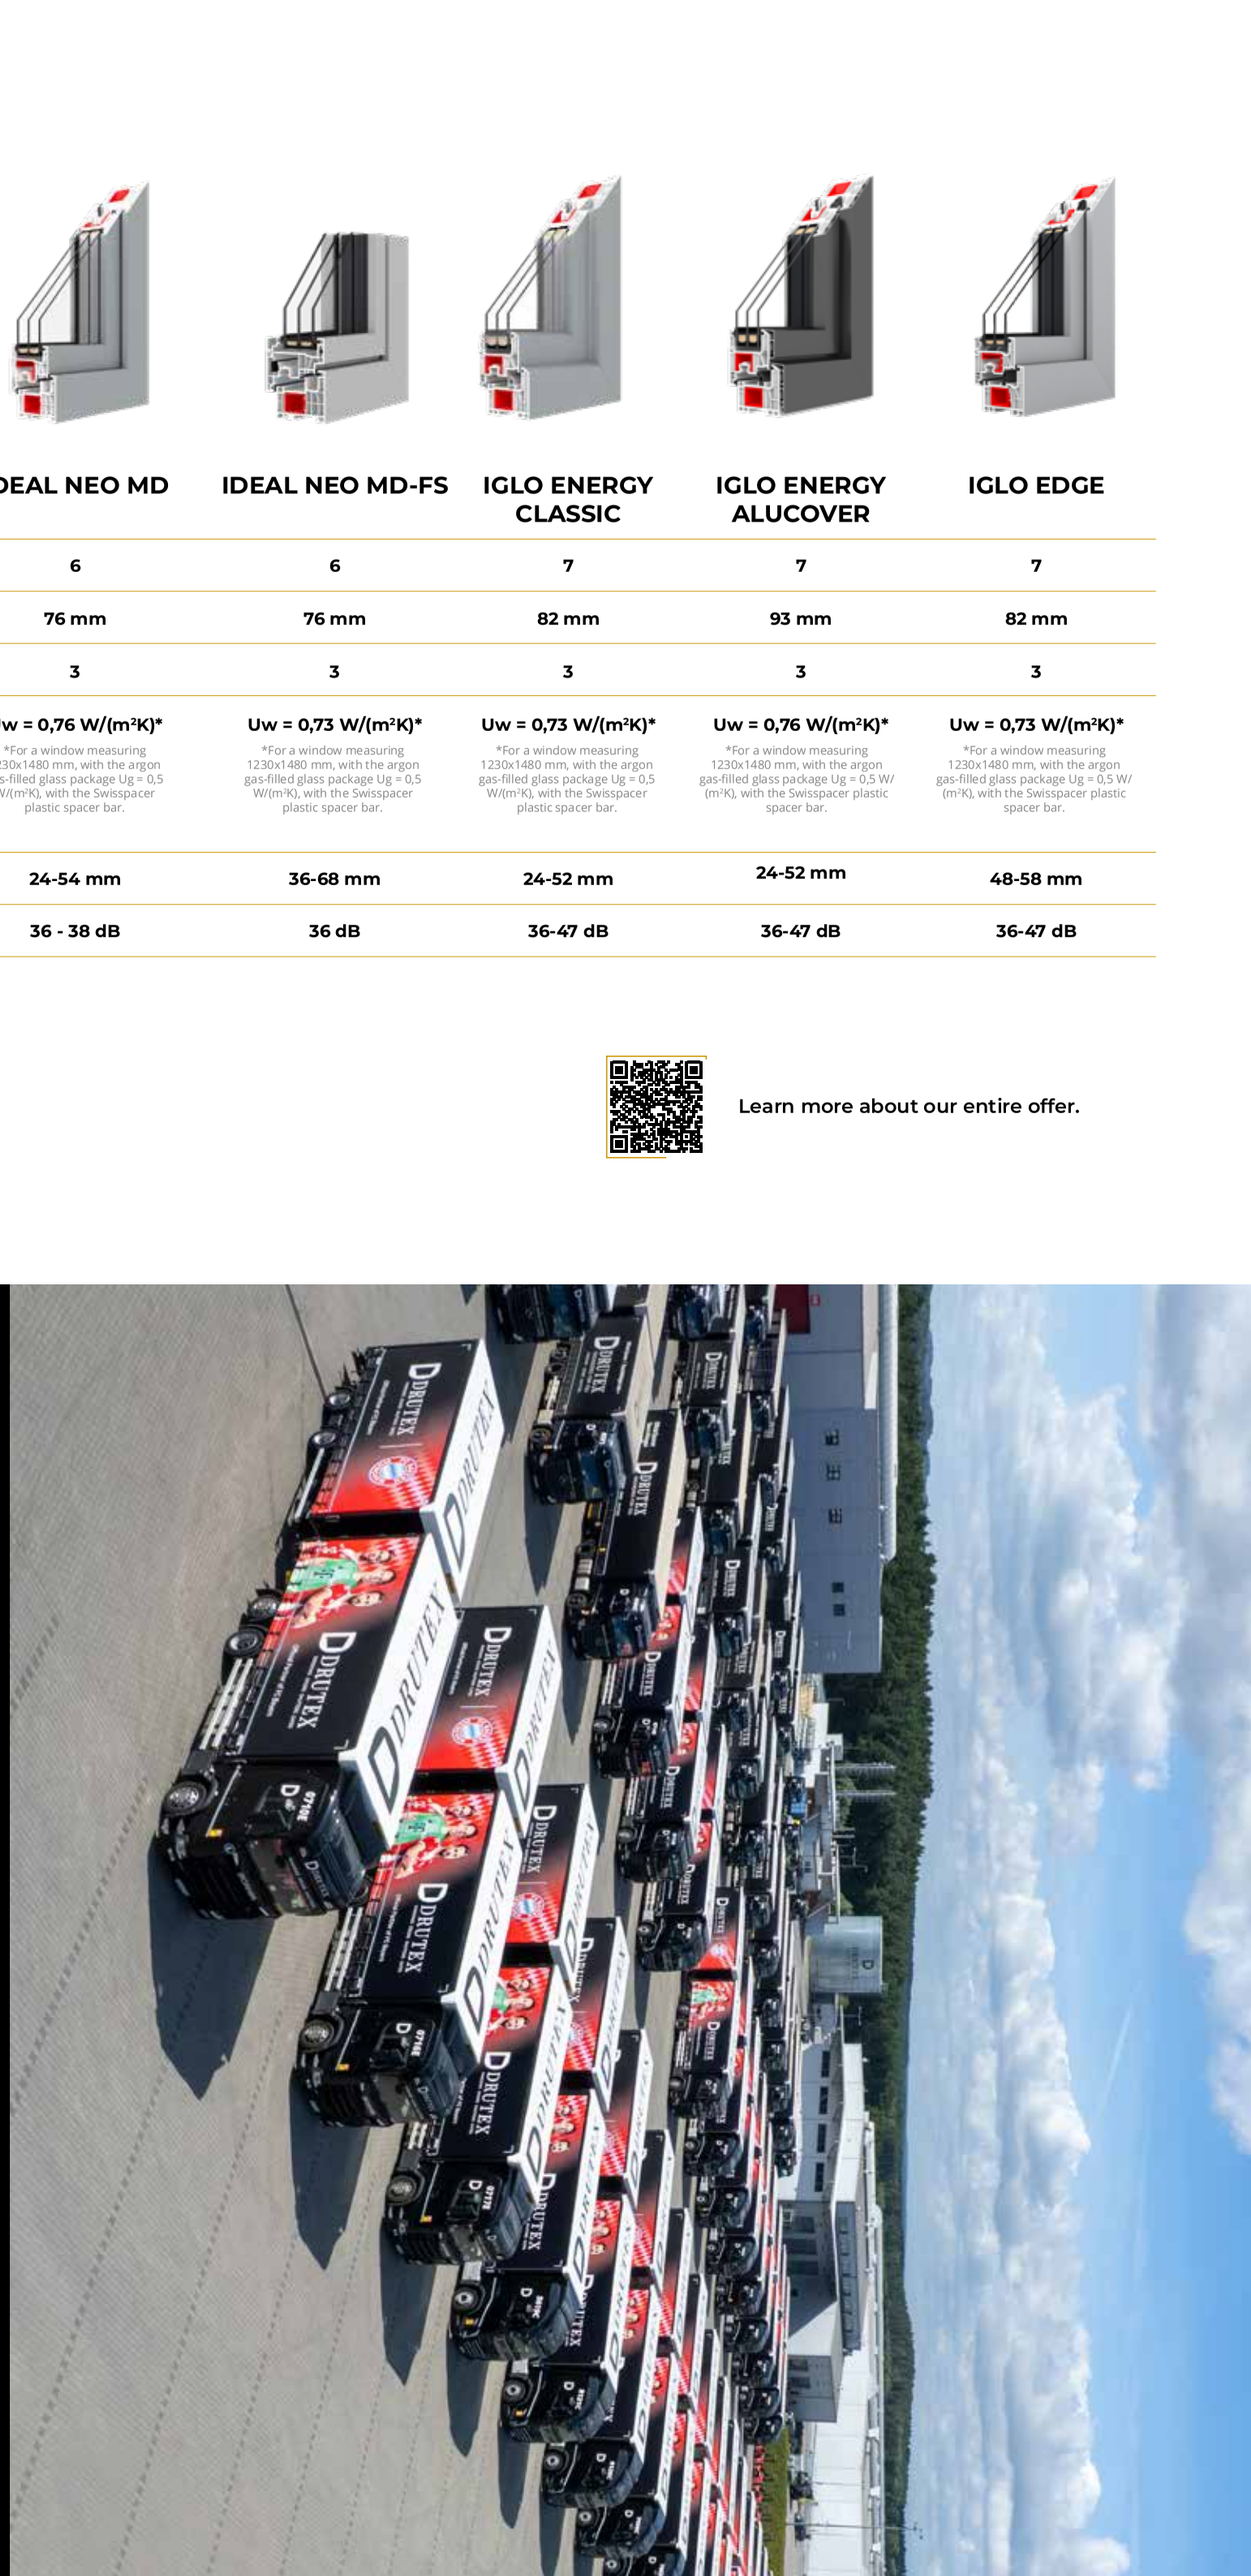

up to 7000 windows daily

4000 employees

650 vehicles

118 Tsd. m² surface production

SINCE 1985

FAST DELIVERY TIME